

basic TANK



TECHNICAL SPECIFICATION

Basic TANK


Part No BP/4548 (6 m³)
BP/4546 (2.5m³)

Application

The basic Tank range of open top storage tanks are light and low volume when empty. During filling the fabric structure self erects and assumes a very stable configuration even in high winds. No tools or support structure are required for basic Tanks, making them a first choice emergency or long term liquid storage facility. The basic Tank range may be used under any climatic conditions, and applications include oil spill recovery, fire-fighting, pressure washing and water storage.

Construction

High frequency welded to guarantee seam integrity from single ply nylon weave material with a PVC based thermoplastic coating. The tank is fabricated with a closed cell, foam filled collar for extra stability.

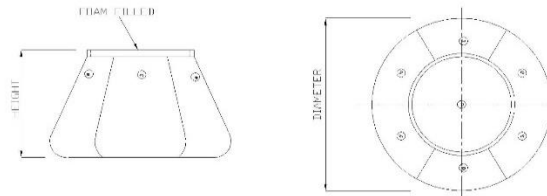

oil storage tanks

Accessories Included

A central internal stainless steel lifting ring is provided for use during cleaning operations.(4214SL)
All tanks are fitted with external stainless steel, top cover restraint rings (4214SL)

Dimensions

	basic Tank 6 m ³	basic Tank 2.5m ³
Capacity	6,000 litres	2,500 litres
Height	143 cm	110 cm
Diameter	256 cm	220 cm
Dry Weight	25 kg	14 kg
Material Weight	1000 gms/m ²	1000 gms/m ²
Packed Size	100 x 60 x 60 cm	98 x 58 x 58 cm

Optional Accessories

	basic Tank 6 m ³	basic Tank 2.5 m ³
Top Cover	(BP/0292)	(BP/0204)
Ground Sheet / Valise	(BP/0216)	(BP/0205)
Ground Sheet	---	---
Repair Kit Cold Glue	SK/1009	SK/1009

Technical Specification No 5/93
Issue 1 PL110518