


Transfer Pumps

VIKOMA

Protecting our environment over 50 years



Quality
Reliability
Innovation

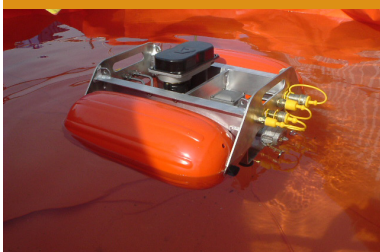

A selection of pumps to compliment your oil spill recovery equipment

- High quality, high performance pumps give a long life cycle and low maintenance to reduce life costs
- The quality and capacity of the pump affects the capacity of skimming equipment. Our positive displacement pumps are designed and matched to equipment, with spare capacity built in to ensure the skimmer head itself can recover oil to the maximum rated capacity

Tel: +44(0)1983 200560



www.vikoma.com

sales@vikoma.com

For more information on Vikoma pumps please visit www.vikoma.com


Mini Transfer Pump

The Mini Transfer Pump can be used as a fluids transfer pump for general use. The unit comes in two parts for easy handling and assembly onsite using pin, bush and eye bolt connections. The unit is driven by a single cylinder diesel engine.

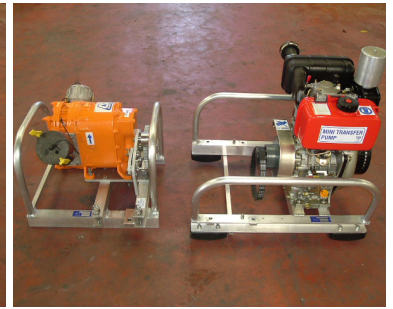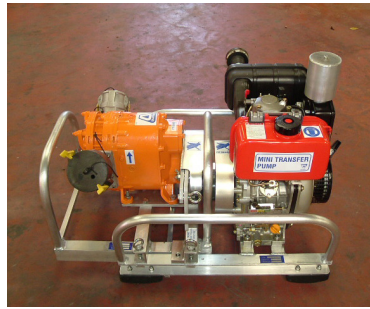

IMP 50 and IMP 50F Transfer Pump


The IMP 50 and floating version IMP 50F is a lightweight, compact transfer pump unit that has been designed for easy transportation by one man. The unit comprises of a hydraulic motor driving a robust and easy to maintain flexible impeller pump via a non-slip toothed drive belt to obtain optimum performance. The hydraulic input and return to the motor is fitted with quick release couplings and the pump with camlock couplings. The whole system is secured in a frame to protect it from damage and aid handling.

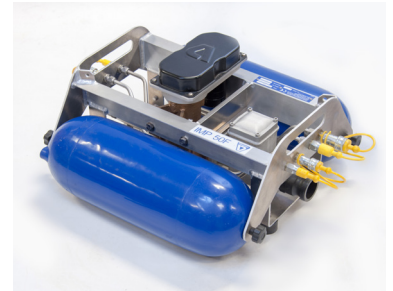

V190 Transfer Pump

A robust and versatile positive displacement pump which can be used for a variety of applications. The pump is mounted in a light aluminium frame making it easy for two people to handle. The pump has excellent suction characteristics, can self-prime and is resistant to dry running.

The V190 can be hydraulically or diesel driven and mounted in a wheeled frame making it easy to handle.

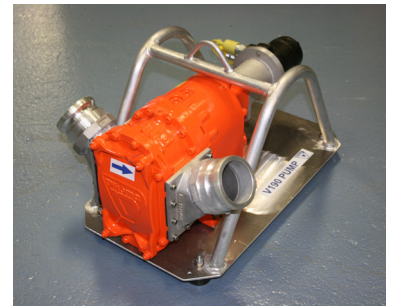

V1128 Transfer Pump

A robust and versatile positive displacement pump which can be used for a variety of applications. The hydraulically driven pump is mounted in a wheeled frame making it easy to handle. The pump has excellent suction characteristics, can self-prime and is resistant to dry running. The V1128W is available with a choice of 3" or 4" suction/discharge connections.



A range of Vikoma pumps are available to meet specific requirements.